



QUICKSTART "BASIC" GUIDELINES FOR MODEL 1601 - WOOD ARM, DOWN LOOP WITH ENTRY LANE TRAFFIC ONLY



120 Glasgow Avenue
Inglewood, California 90301
U.S.A.

Model 1601 is intended for installation only on barrier gates used for vehicles.

Pedestrians must be supplied with a separate access opening. For safety and installation instructions, please refer to the Installation/Owner's manual.

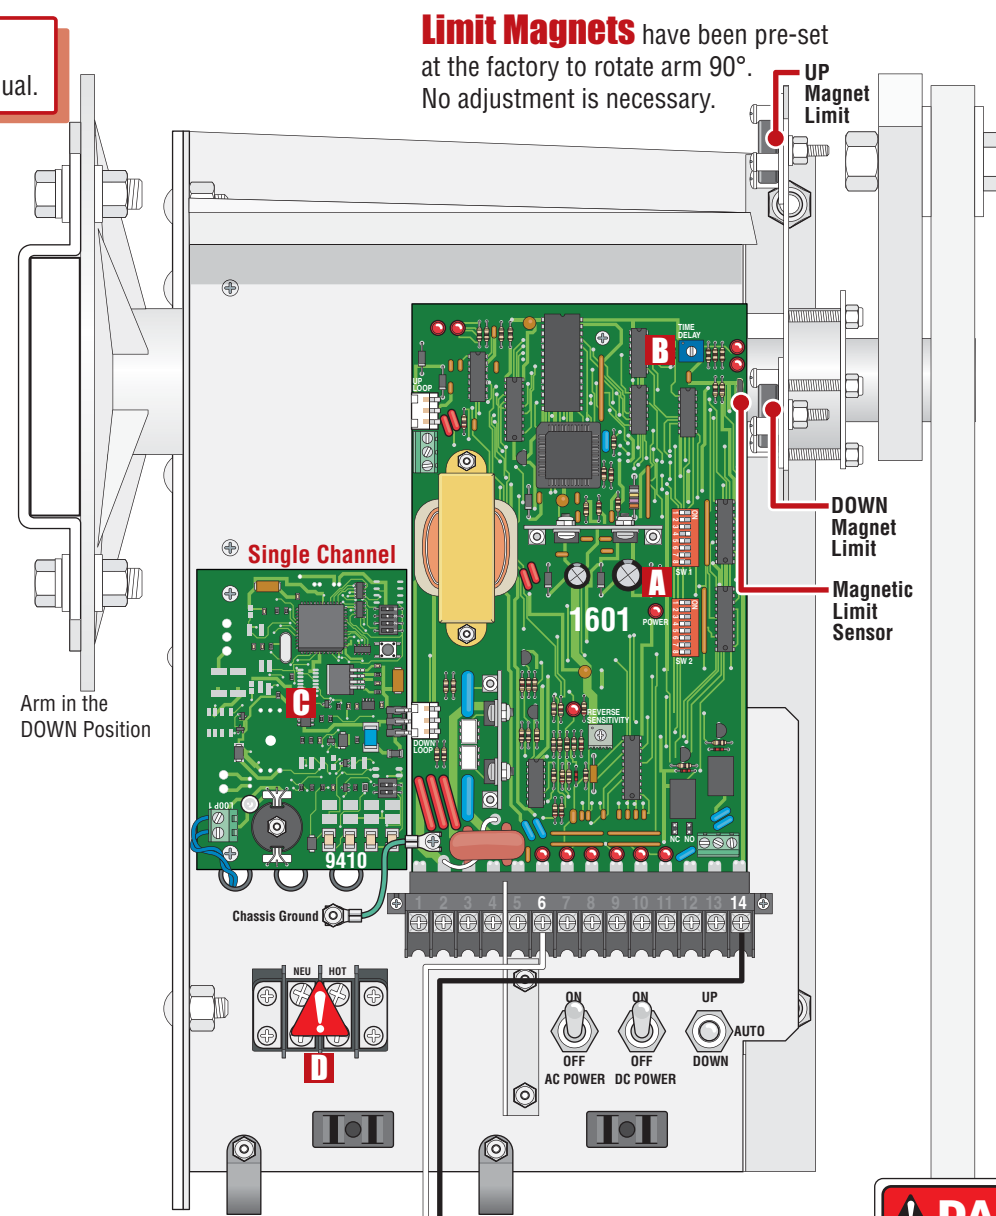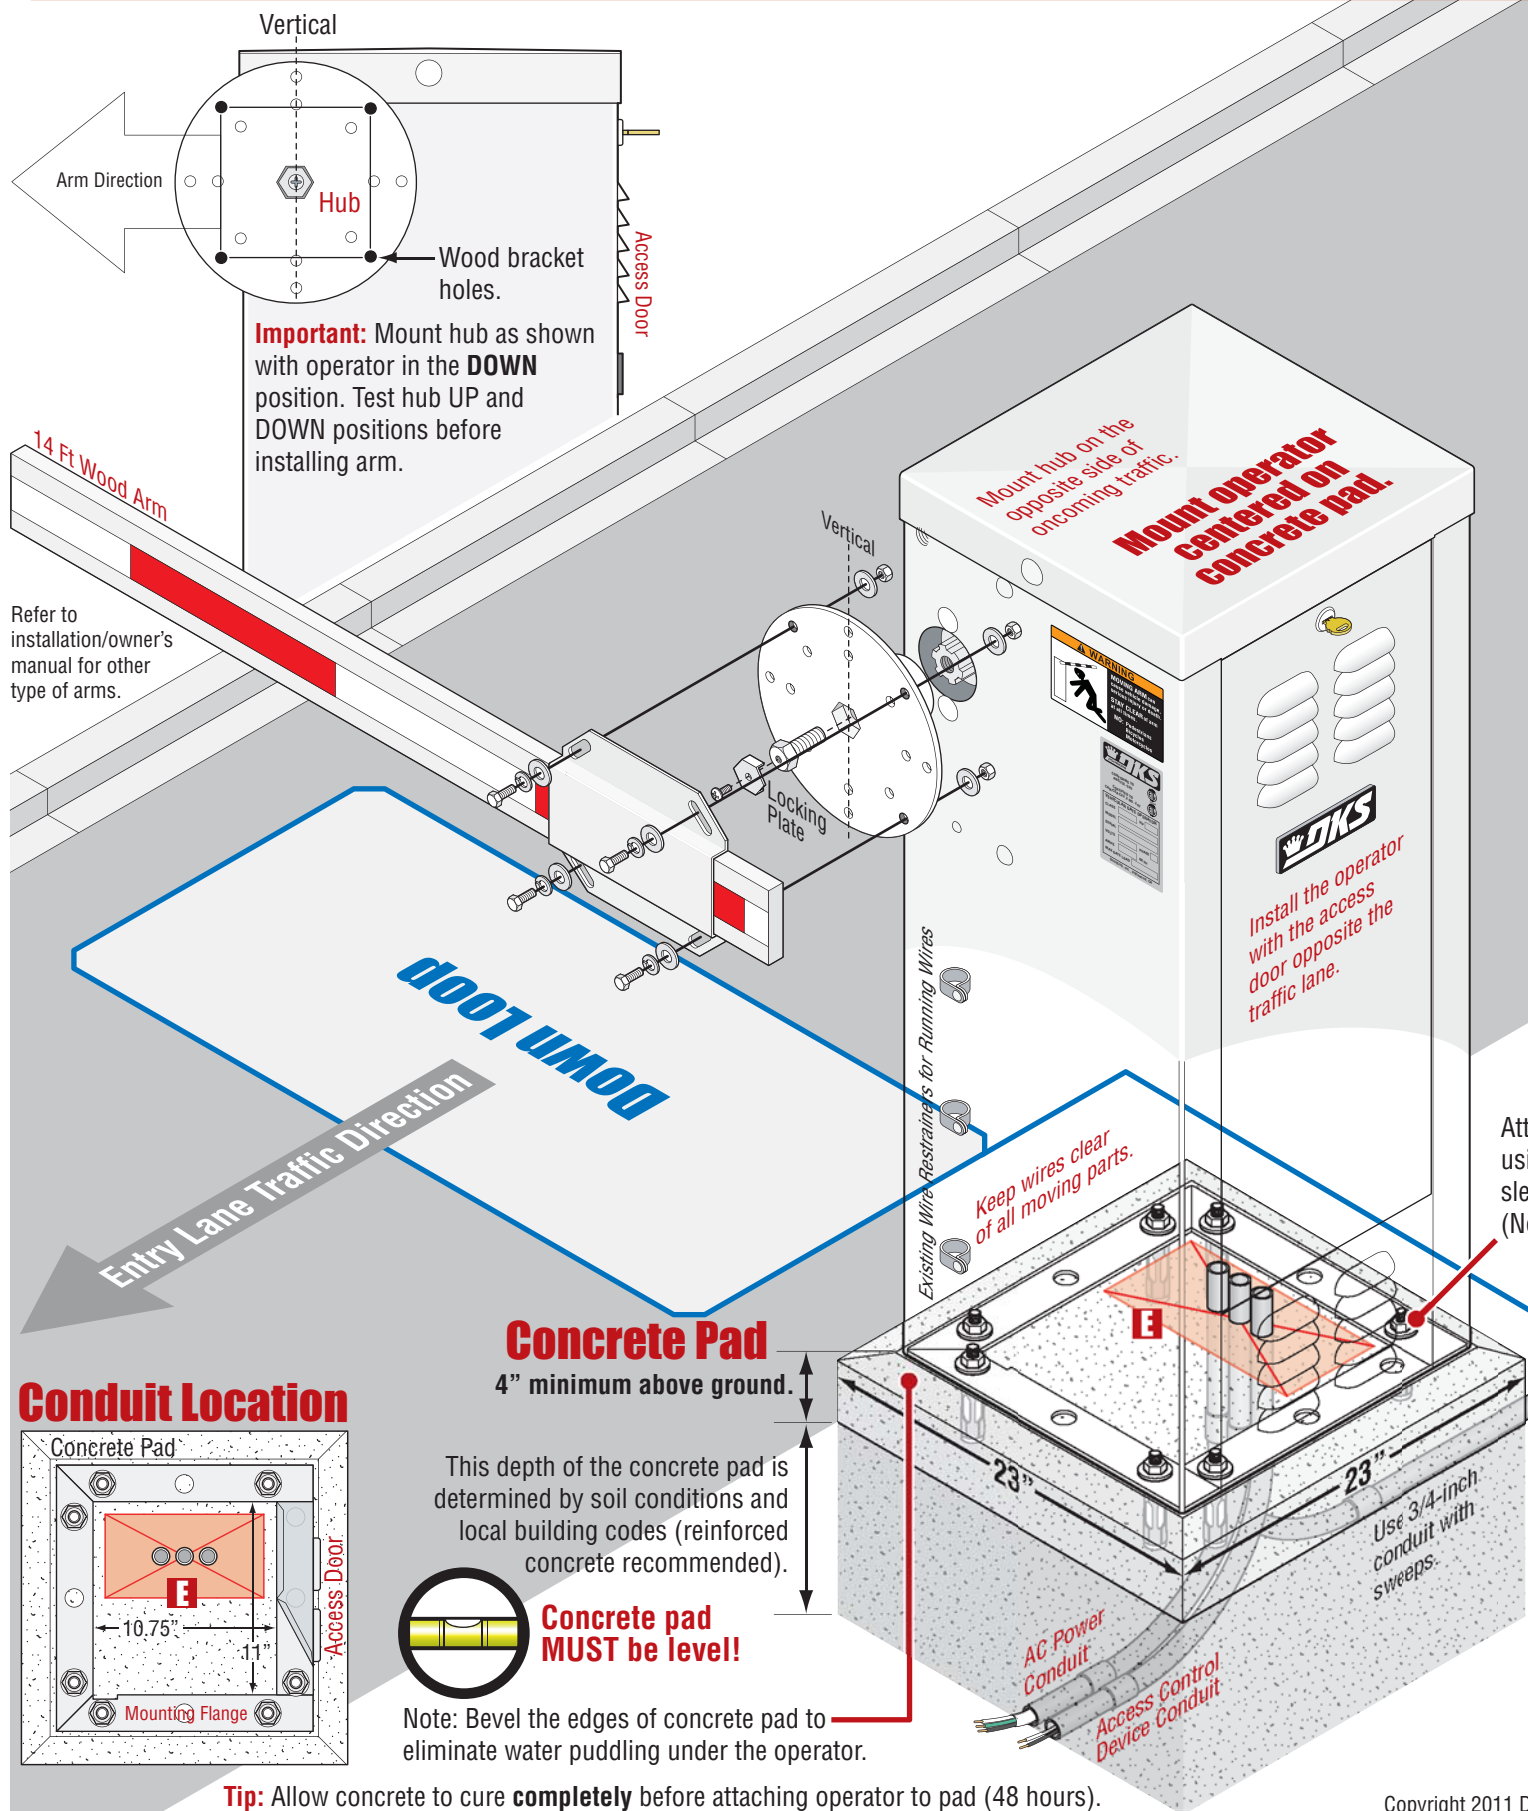

DIP-Switches

SW1

1.	OFF
2.	OFF
3.	OFF
4.	ON
5.	OFF
6.	OFF
7.	Auto-Close Timer
8.	ON

SW2

1.	OFF
2.	OFF
3.	OFF
4.	OFF
5.	OFF
6.	OFF
7.	OFF
8.	OFF

Auto-Close Timer

When SW1, switch 7 is turned ON, automatic timer can be set from 1-59 seconds to automatically lower arm.

Note: The auto-close timer CAN be used with a down loop. Refer to the installation/owner's manual for more information.

Plug-In Loop Detectors

C Not included - Refer to the Installation/Owner's manual and Loop Information Manual (available from www.dkaccess.com) for more information on loops and loop detectors.

High Voltage Connection

GATE OPERATOR MUST BE PROPERLY GROUNDED!!

Tip: It is recommended that a surge suppressor be installed on the high voltage power lines.

