

1812 HEATER KIT

DoorKing Part Number

2600-588

This kit is designed for the 1812 model telephone intercom system. For climates where temperatures routinely drop below 40°F (4°C). An automatic thermostat will control temperature inside the housing.


Kit Includes:

Heater assembly in mounting bracket with thermostat.

(2) two magnets to mount heater.

(2) wire nuts.

16.5 VAC 20 VA transformer.

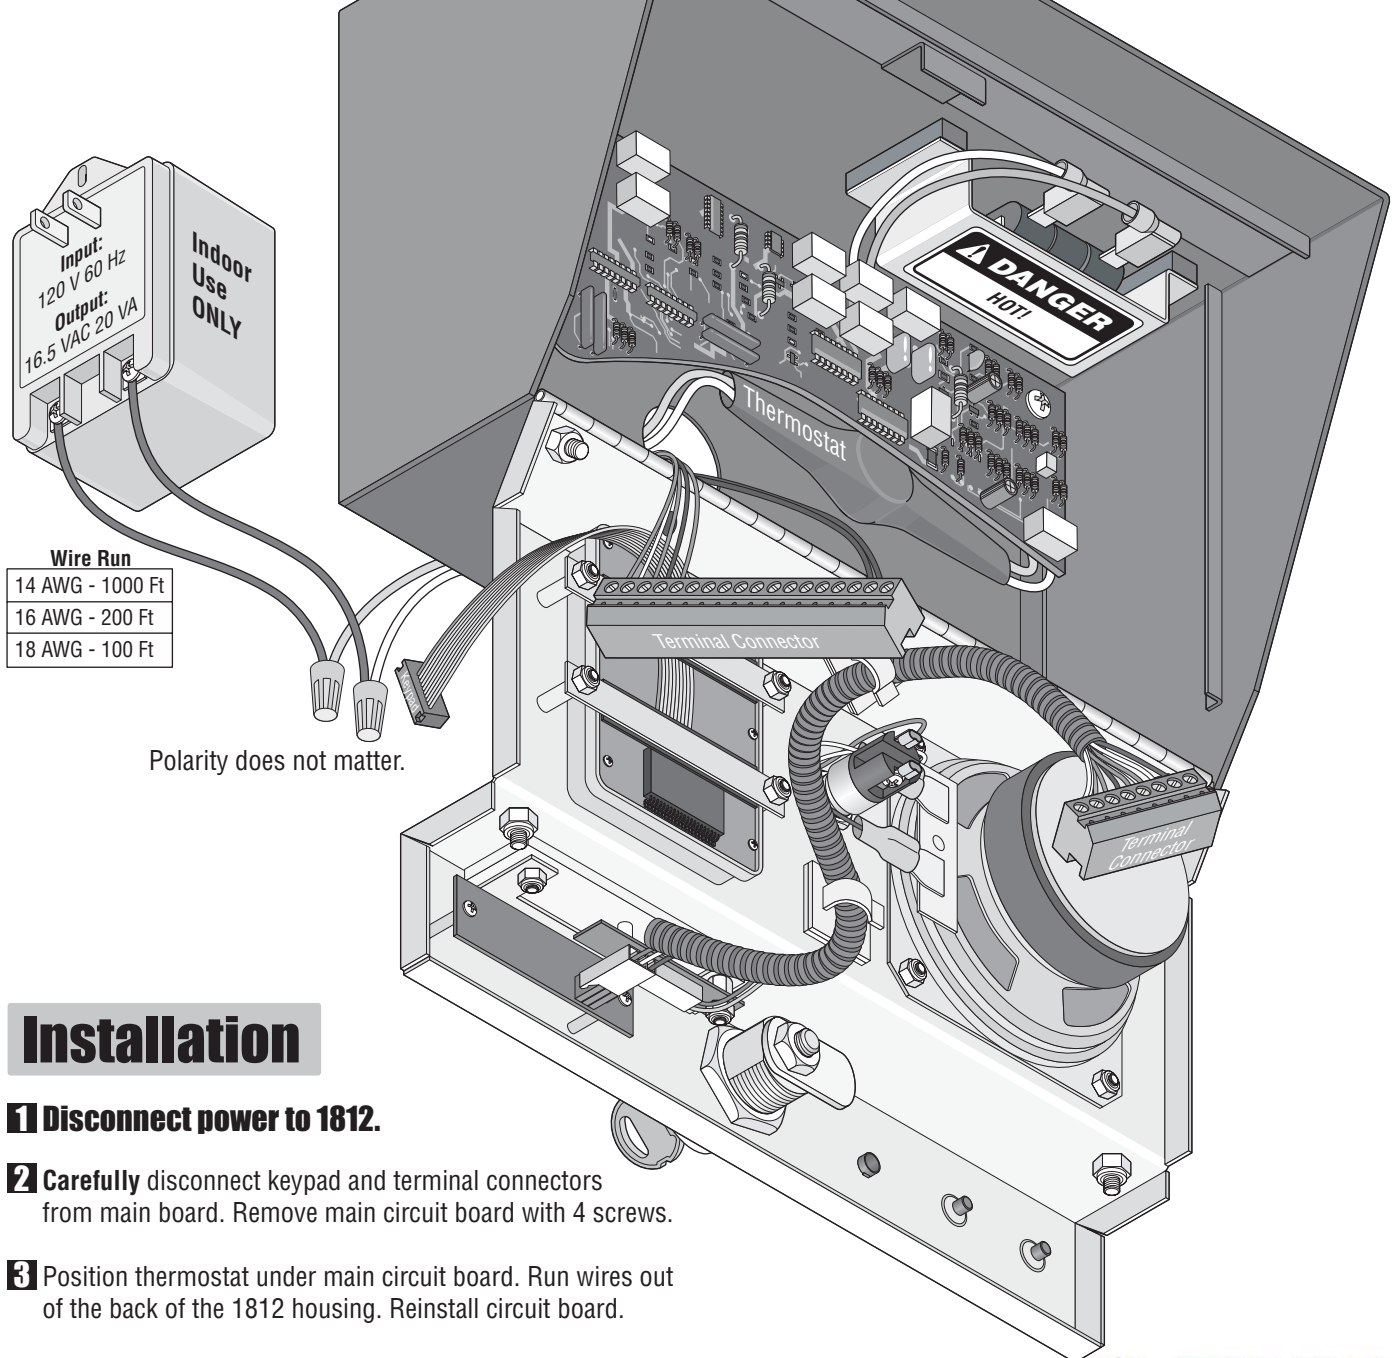

Installation

- 1 Disconnect power to 1812.**
- 2 Carefully** disconnect keypad and terminal connectors from main board. Remove main circuit board with 4 screws.
- 3** Position thermostat under main circuit board. Run wires out of the back of the 1812 housing. Reinstall circuit board.
- 4** Mount heater assembly in position shown with 2 magnets. Make sure heater does not touch circuit board.